




Advantex® Boron-Free E-CR Glass Reinforcement Products

ADVANTEX® GLASS IS E-GLASS AND E-CR GLASS


Advantex® glass offers a full line of products for every type of composite application designed to face corrosive environments. As an engineer, end-user, or fabricator selecting Advantex® glass will ensure you will be specifying, using, or making the highest quality composite applications ready to face the harshest environments. Select Advantex® glass when corrosion failure is not an option.

A proven product, introduced to the market in the late 1990's, Advantex® glass offers the unique attributes of being both a boron-free E-glass and an E-CR glass reinforcement in accordance with ASTM D578 and ISO 2078. See examples below where each type of reinforcement is used in applications facing corrosion.

Filament Winding or Laminate (Ex. Pipe, Tank, Ducting, etc.)

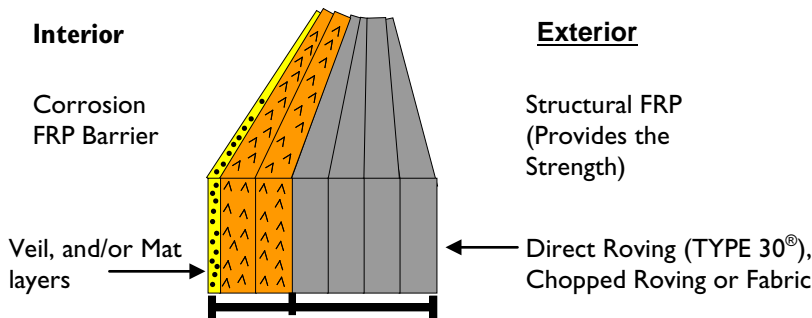

Pultruded Applications (Ex. Grating, Railing, Structural, etc.)

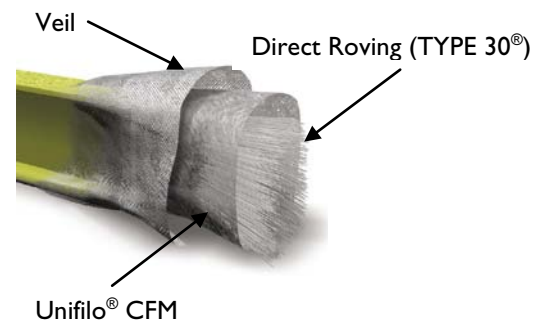


Direct Roving (TYPE 30®)

Used in the structural portion of most applications, Direct Roving provides the strength in filament wound and pultruded applications including pipe, tanks, structural I-beams, piling, grating and many other applications facing corrosion. Specifying E-CR reduces the risk of structural failure due to its stability in corrosive environments.



Chopped Strand Mat (CSM)

Many times CSM is used as part of the corrosion barrier in applications facing corrosion. Our Advantex CSM allows a resin rich environment but also delivers the necessary strength for a long lasting composite part.

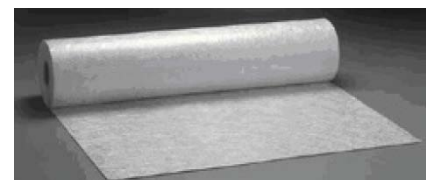

Unifilo® Continuous Filament Mat (CFM)

Continuous filament mat is used in the pultrusion processes and provides the transversal resistance with high mechanical properties able to withstand corrosive environments.



Advantex® Boron-Free E-CR Glass Reinforcement Products


Veil

Veils strengthen the resin-rich corrosion barrier of many types of applications creating a strong bond with the underlying laminate. Surfacing veils also isolate the substrate fibers exposure to abrasion and corrosion, contributing to the structural integrity of the total composite.



Technical Fabrics

OCV™ Woven Roving Fabrics provide high-quality products designed to meet your performance in corrosion. Whether the need is woven roving, multiaxial, unidirectional, or a combination we can provide the E-CR solution. The fabric delivers cost effective solutions to your competitive reinforcement challenges, particularly large parts such as high-durability laminates or large process or storage vessels.



TAKE RISK OUT – PUT ADVANTEX® GLASS IN

For more information, visit www.owenscorning.com/composites/aboutAdvantex.asp

THE OCV™ BUSINESSES ARE WORLDWIDE SUPPLIERS

Supporting our customers with the entire Advantex® reinforcement product range including glass fiber, technical fabrics and specialty glass.

Most OCV™ products are manufactured with Advantex® glass today. Ongoing conversion programs are underway in Europe, Asia Pacific and Latin America manufacturing plants while North America plants are already converted 100% to Advantex® glass.

Contact

Advantex.americas@owenscorning.com

North America: +1 614 507 5828

Latin America: +55 19 3535 9316

Advantex.europe@owenscorning.com

Advantex.asiap@owenscorning.com

India: +91 22 6668 1717

S. Korea: +82-54-429-5782

China: +86 571 88130808 - EXT. 5682

Japan: +81 280 92 6049



OCV™ Reinforcements

**OWENS CORNING
COMPOSITE MATERIALS, LLC**
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
1.800.GET.PINK™
www.owenscorning.com
www.ocvreinforcements.com

**EUROPEAN OWENS CORNING
FIBERGLAS, SPRL.**
166, CHAUSSÉE DE LA HULPE
B-1170 BRUSSELS
BELGIUM
+32.2.674.82.11

**OWENS CORNING – OCV ASIA PACIFIC
SHANGHAI REGIONAL HEADQUARTERS**
OLIVE L.V.O. MANSION, 2ND FLOOR
620 HUASHAN ROAD
SHANGHAI 200040
CHINA
+86.21.62489922

This information and data contained herein is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law safety code or insurance regulation.

Pub. Number# 10012614. Owens Corning reserves the right to modify this document without prior notice. © 2010 Owens Corning.

Advantex_ECR_glass_productform_ww_201004_Rev2