

# Pipes



**Solutions that make a difference**



OCV<sup>™</sup> Reinforcements




OCV<sup>™</sup> Technical Fabrics




OCV<sup>™</sup> Non-Woven Technologies

# PIPE MARKET




Pipes are used to carry potable water, sewage water, oil, gas, and other chemicals. It is a growing market, especially in Eastern Europe and the Middle East because of population increases and urbanization. Concrete, cast iron, steel and thermoplastic are the most common materials currently used to make pipes. However, Glass Reinforced Plastic is growing rapidly in its market share. GRP pipes can be made by Centrifugal Casting, Filament Winding and Continuous Filament Winding processes.

GLOBAL PIPE MARKET BY END USE APPLICATION (vol.)

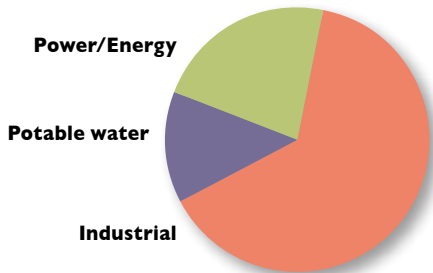

GLOBAL PIPE MARKET BY REGION (vol.)




## PIPE MAKING PROCESSES

### FILAMENT WINDING

There are two basic methods of filament winding. In one method, helical winding, the resin-impregnated continuous fibre rovings are wound at a controlled helix angle in each selected direction on a removable mandrel.

The other method, continuous filament winding, allows one to produce continuous pipes with adjustable diameters from DN80 to DN4000 with chopped fibers, circumferential wrapped fibers and sand to provide the required pipe strength and stiffness.




Most pipes made by either of the two methods have an inner layer consisting of a smooth resin-rich surface reinforced with veil made of glass to provide maximum abrasion, corrosion resistance and smoothness to guarantee lower head losses than traditional materials.

### CENTRIFUGAL CASTING

Multi-End rovings going through a chopper and resin are sprayed into a rotating, cylindrical, metal mold. The resin impregnates the reinforcement under the effect of the centrifugal force and forms, after polymerization, a cylindrical structure.

Centrifugal casting is particularly well suited for producing structures with large diameters.

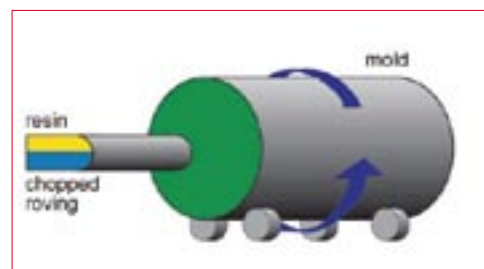

# MARKET NEEDS

- Reliable and fast processing
- Cost-effective performance
  - . Work pressure resistance vs. thickness
  - . Material savings
  - . Smoother exterior finish
  - . Enhanced long-term durability
  - . Very good corrosion resistance in acidic environments
  - . Very good stress-corrosion resistance under constant stress
- Leads to easy to install/transport products
- Enables production of pipes, fittings and accessories

# OCV™ SOLUTIONS

- Advantex® glass
- SE (Single-End) rovings
  - ME (Multi-End) rovings
- ECR and C-Glass Specialty Non-Wovens
- Technical Fabrics; Multiaxials for pipe relining and maintenance
- CSM (Chopped Strand Mat)
- High Performance Reinforcements
- Global product portfolio for the production of pipes, fittings and accessories
- Products optimized for various resins and production processes



# OCV™ BUSINESSES PROVIDE A COMPREHENSIVE RANGE OF REINFORCEMENT PRODUCTS FOR PULTRUSION SINGLE-END ROVINGS



*Our Advantex® glass SE rovings contribute to superior mechanical properties for pipes made with a continuous process. They enhance pipe life-time in chemical and sewage pipe markets.*

NA	LA	EMEA	AP	PRODUCT	RESIN COMPATIBILITY			
					EPOXY	POLYESTER	VINYLESTER	PHENOLIC
●	●		●	158B	●			
●	●	●	●	<b>R25H*</b>	○	●	●	
●	●	●	●	<b>SE1200*</b>	○	●	○	○
●				366	○	●	●	
●			●	SE2348	●			
●	●		●	SE2350	●			○
	●			<b>688*</b>		●	○	
	●	●	●	SE1500	●			
	●			64Y	●			
		●		117A	○	○	○	
		●		202	●	○	○	
●				346	●			

NA : North America. LA : Latin America. EMEA : Europe Middle East Africa. AP : Asia Pacific

## MULTI-END ROVINGS



*Multi-End rovings help easy processing and provides high mechanical properties before and after ageing. They are compatible with a wide range of resin systems such as polyester and vinylester for highly demanding applications such as pipes or tanks for wastewater treatment and chemical outlets.*

\* Several OCV™ Reinforcements SE and ME rovings are also safe for use in pipes for potable water distribution.

APPLICATION	AMERICAS	EUROPE	ASIA
Centrifugal Casting		<b>P219*</b>	CCR520 <b>P219*</b>
Chop and Drop	P246 <b>495EP*</b>	P246 <b>495EP*</b>	P246 - ME3023 <b>495EP*</b>

# NON-WOVEN PRODUCTS



*OCV™ Non-Woven Technologies provides a wide variety of ECR and C-glass veils for filament winding. The mandrel can be covered with a veil for an inner/exterior corrosion resistant and/or aesthetic surface.*

M524 RANGE	STYRENE SOLUBILITY	FIBRE TYPE	FIBRE DIAMETER	FILAMENT WINDING POLYESTER	FILAMENT WINDING EPOXY
ECR50S - ECR30S	v. sol	ECR	13	●	
ECR20A- ECR25A - ECR30A	slowly sol	ECR	13	●	
ECR70A/3 - ECR50A/3	slowly sol	ECR	13		●
ERC50H/3 - ECR30H/3	slowly sol	ECR	13		●
C64	v. sol	C	12.5	●	
C33	slowly sol	C	12.5	●	

We have in house capability to slit our C- and E-CR-glass Veils in widths of 35 mm bandages upwards.


## ■ E-CR-glass veils:

Advantex® glass wet use veils provide excellent corrosion resistance. 20 up to 70 g/m<sup>2</sup> veil types are suitable for both continuous and discontinuous filament winding, glass reinforced plastic and glass reinforced epoxy pipes.

## ■ C-glass veils:

Long fibre highly drapable dry use veils with excellent wet out capability and conformability. Ideally suited for the fixture and fitting market where a resin rich surface is required to protect the outside of the pipe from Ultra Violet and chemical attack.

# TECHNICAL FABRICS



*Several products can be used for these applications, mainly for reinforcing the GRP pipes in order to improve the pressure resistance or for the fitting joints.*

## Product types

■ **Woven** : Balanced/Unbalanced Woven Roving, Tapes and UD Tapes ( 0° or 90°)

■ **Stitched**: Multiaxials, Unidirectionals, Woven Roving with Chopped Strand Mats

# ADVANTAGES OF GRP<sup>(1)</sup> PIPES VS. TRADITIONAL MATERIALS




- Light weight (approximately 1/10 of concrete pipes and 1/4 of steel pipes)
  - » lower transportation and installation costs
- Workability of the material on site with the use of simple tools
  - » easy assembly and installation
- Longer pipes than with competing materials; no welding needed and fewer joints
  - » lower cost and easier installation
- Virtually impermeable
  - » superior leak resistance
- Smoothness of the internal wall, minimized pressure drops and no formation of deposits
  - » higher transport rate
- Better hydraulic performance than steel, ductile iron and concrete
  - » more efficient carrier
- Corrosion resistance. No protection such as coating, painting or cathode are needed
  - » lower cost and better maintenance
- With Advantex<sup>®</sup> glass, even more resistance to corrosion by strong diluted acids such as H<sub>2</sub>SO<sub>4</sub>, compared to E-glass
- Better stress- and strain-corrosion resistance (to acids) than traditional E-glass reinforced GRP pipes
  - » “Install it and forget it”
- Low thermal conductivity
  - » reduces condensation problems and resulting moisture related corrosion
- Hazen Williams flow coefficient is 150, due to low friction losses
  - » less pumping energy is required compared to steel and concrete pipes or the same flow rates can be ensured using smaller diameters


(1) Glass Reinforced Plastic

# ADVANTEX<sup>®</sup> IS THE MOST ENVIRONMENTALLY FRIENDLY E-GLASS

Boron Traditional E-glass

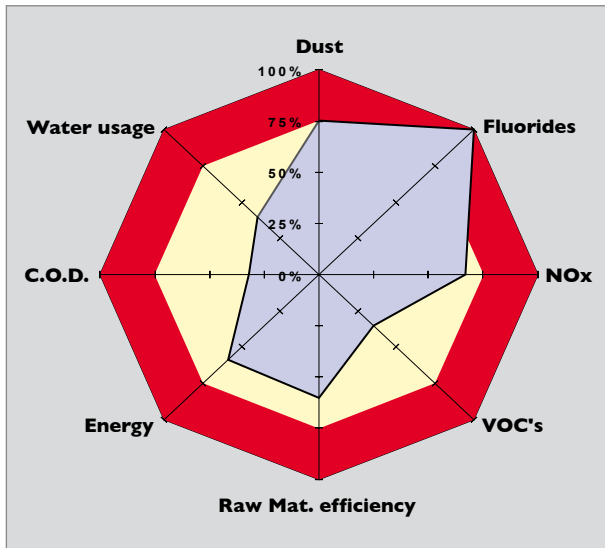

Boron-free Advantex<sup>®</sup> glass

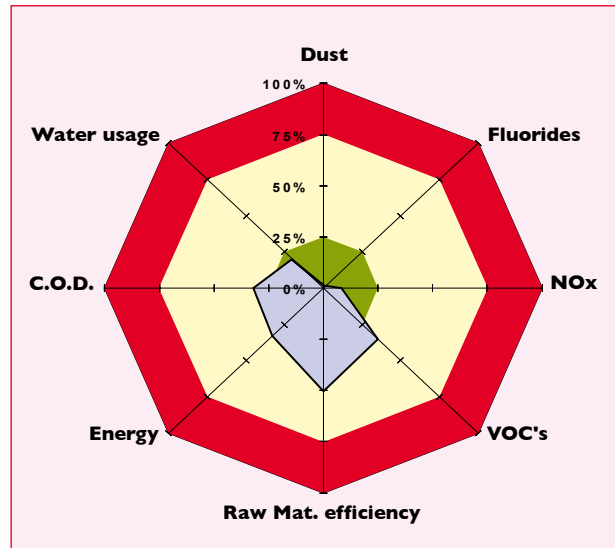

The above comparison was typical for OCV<sup>™</sup> plant conversions. Actual results vary from plant to plant.



## OCV<sup>™</sup> BUSINESSES PRODUCE ADVANTEX<sup>®</sup> GLASS

### ■ With Lower Environmental Footprint:

- a boron-free glass
- a fluorine-free glass

- Both a true E-glass and a true E-CR glass (according to ASTM D578)
- Performing better than traditional E-glass particularly in acids and water and to a certain extent in alkaline solutions
- Allowing material savings versus E-glass
- With a superior resistance to high temperature (higher softening-point temperature)



- Up to **54% higher** allowable strain in strain-corrosion resistance, in H<sub>2</sub>SO<sub>4</sub>
- Up to **50 Years** instead of 3 months lifetime for pultruded rods, in stress-corrosion in salt water (under identical conditions)
- Up to **50 Years** instead of 4 day lifetime for rods, in stress-corrosion in 1N HCl (under identical conditions)

# YOUR GLOBAL PARTNER FOR COMPOSITE SOLUTIONS



**OCV™ Reinforcements**

■ Facilities in 15 countries worldwide



**OCV™ Technical Fabrics**

■ More than 9,000 employees



**OCV™ Non-Woven Technologies**

■ More than 15 languages

■ 39% of Owens Corning revenue

■ [www.owenscorning.com/composites](http://www.owenscorning.com/composites)



**OCV™ Reinforcements**



**OCV™ Technical Fabrics**



**OCV™ Non-Woven Technologies**

[www.owenscorning.com/composites](http://www.owenscorning.com/composites)

## CONTACTS:

OWENS CORNING  
COMPOSITE MATERIALS, LLC  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO 43659  
1.800.GET.PINK™

EUROPEAN OWENS CORNING  
FIBERGLAS SPRL  
166, CHAUSSÉE DE LA HULPE  
B-1170 BRUSSELS - BELGIUM  
+32 26 74 82 11

OWENS CORNING - OCV ASIA PACIFIC  
SHANGHAI REGIONAL HEADQUARTERS  
2F OLIVE LVO MANSION  
620 HUA SHAN ROAD  
SHANGHAI CHINA 200040  
+86 21 62 48 99 22

OCV FABRICS US, INC.  
43 BIBBER PARKWAY  
BRUNSWICK, ME 04011  
U.S.A.  
+1 207 729 7792

OCV FABRICS BELGIUM BVBA  
DRUKKERIJSTRAAT 9  
B-9240 ZELE  
BELGIUM  
+32 52 45 76 11

OCV TECHNICAL FABRICS  
2/F, NO. 68 TSO WO HANG  
SAI KUNG, KOWLOON  
HONG KONG  
+852 9091 3534

SingleEndRovings.ovamericas@  
owenscorning.com

SingleEndRovings.ovemea@  
owenscorning.com

SingleEndRovings.ovvap@  
owenscorning.com

MultiEndRovings.ovamericas@  
owenscorning.com

MultiEndRovings.ovemea@  
owenscorning.com

MultiEndRovings.ovvap@  
owenscorning.com

sales.na.ocvtf@owenscorning.com

sales.eu.ocvtf@owenscorning.com

sales.ap.ocvtf@owenscorning.com

[nonwovensinfo@owenscorning.com](mailto:nonwovensinfo@owenscorning.com)



INNOVATIONS FOR LIVING™

OWENS CORNING COMPOSITE MATERIALS, LLC  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659  
1-800-GET-PINK™  
[www.owenscorning.com](http://www.owenscorning.com)



Pub. N° 10010847. Printed in France on recycled paper.  
March 2009. THE PINK PANTHER™ & ©1964-2009  
Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The color PINK is a registered  
trademark of Owens Corning. ©2009 Owens Corning.

This information and data contained herein is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law safety code or insurance regulation.

Owens Corning reserves the right to modify this document without prior notice.  
PIPE\_OCV Range\_ww\_03-2009\_Rev0\_US FORMAT